


Red trifásica 11,4 kV ó 13,2 kV trifilar
Red a dos fases 11,4 kV ó 13,2 kV bifilar

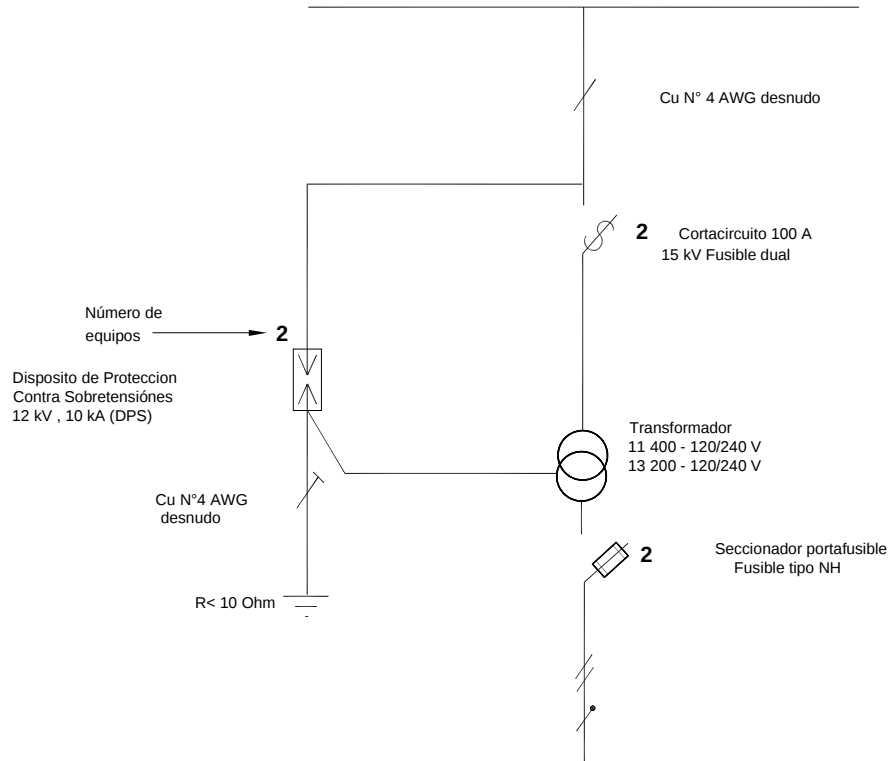

CAPACIDAD	MEDIA TENSION					BAJA TENSION 120-240 V				
	13,2kV In (A)	11,4 Kv In (A)	COBRE CALIBRE (AWG)	FUSIBLE TIPO DUAL (Ref)	In (A)	CABLE MONOPOLAR		FUSIBLE		SECCIONADOR PORTAFUSIBLE
						FASES Cu(AWG)	NEUTRO Cu(AWG)	NH (Ref)	A (A)	
5	0,38	0,44	4	0,4	21	2	2	00	25	160
10	0,76	0,88	4	0,6	41.7	2/0	1/0	00	50	160
15	1,14	1,32	4	0,7	63	2/0	1/0	00	80	160
25	1,89	2,2	4	1,4	104	2/0	1/0	1	125	160
37,5	2,84	3,29	4	2,1	156	2/0	1/0	2	200	400
50	3,79	4,39	4	3,1	208	4/0	1/0	2	250	400



DIAGRAMA UNIFILAR
INSTALACIÓN DE TRANSFORMADOR
DE DISTRIBUCIÓN BIFILAR
11,4 O 13,2 kV – 120 / 240 V

ELABORÓ
DISEÑO DE LA RED

EMISIÓN
03-03-1999

ÚLTIMA REVISIÓN
22-09-2009

CTR 510
Pág. 1 de 1